


FIMAFY

Filtering technologies for
microalgae and sustainable high-
quality feed for fry

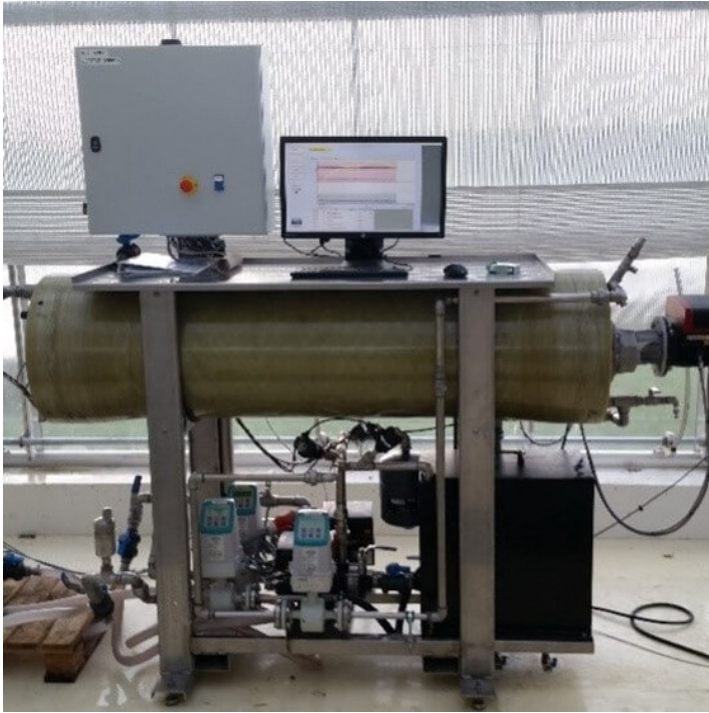

FIMAFY

Development of filtering technologies for microalgae and sustainable high-for fry.

There is an urgent need for alternative resources to fishmeal and fish oil to produce for the aquaculture industry. The resource problem is due to the rapid growth of aquaculture fact that catches of fish for the feed industry are stagnating. The idea to use microalgae feed originated from an ongoing EU project, which demonstrates that algae can be processed with water from the industry.


FIMAFY has employed strategies to provide a clear concept for microalgae up- and downstream processing, investigated the shelf-life stability of the dried biomass, and finally evaluated biomass as a fish feed ingredient. Pre-Gasified industrial process water with a high concentration of ammonia and free from toxic compounds, representing effluent from a local biogas plant, was used as a low-price growth medium. In this study, an innovative downstream process was developed. The process setup includes crossflow microfiltration (MF) by silicon carbide ceramic membranes, up-concentration by bowl centrifuge, and finally delicate drying of biomass by a novel swirl(spin) flash dryer. Harvest trials have been performed on eight microalgae species



(*Monodopsis subterranean*, *Nannochloropsis salina*, *Dunaliella salina*, *Phaeodactylum*, *Chlorella Vulgaris*, *Chlorella sorokiniana*, *Chlorella pyrenoidosa*, and *Desmodesmus*)


All the species showed the same flux pattern while the performance of the harvest was species-dependent. The recovery efficiencies were higher or equal to 98%, while no fouling was observed. The filtration VCR (volume concentration ratio) for microalgae harvest was between 10-30, depending on the species cell size, shape, and other parameters. They have also been successfully tested on a large scale for *Nannochloropsis salina*. Energy consumption in this processing technology is estimated at 28% lower than known current processing technologies applied to microalgae. These findings represent the SIC-UF membrane filtration as a robust and feasible technique for the downstream processing of microalgae.

Participants

- BioMar A/S, Denmark
- LiqTech International A/S
- IFAU, Denmark
- Ecolipids A/S
- DTU Food
- DTU Aqua

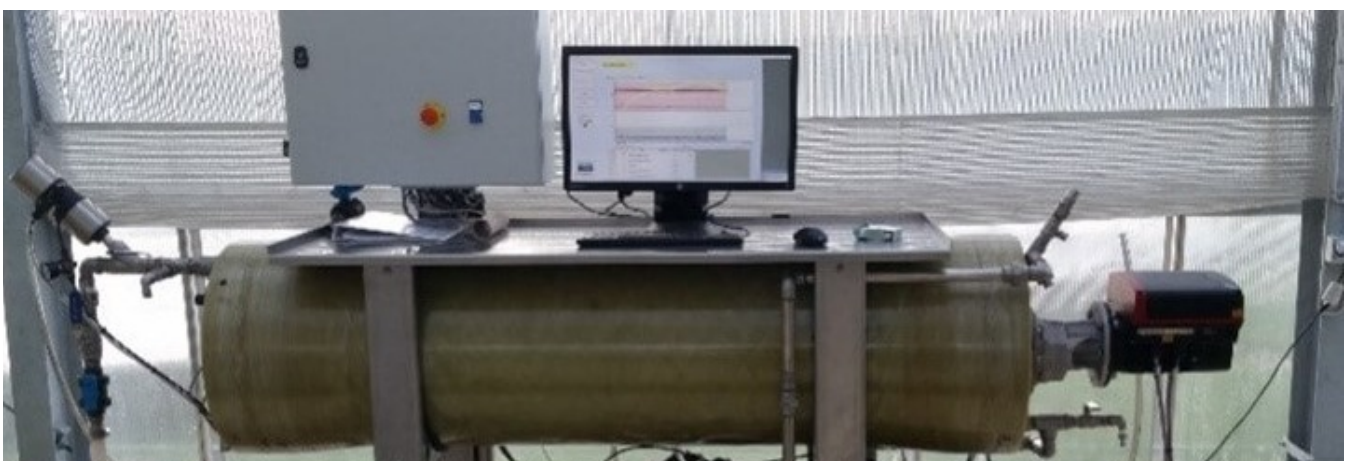

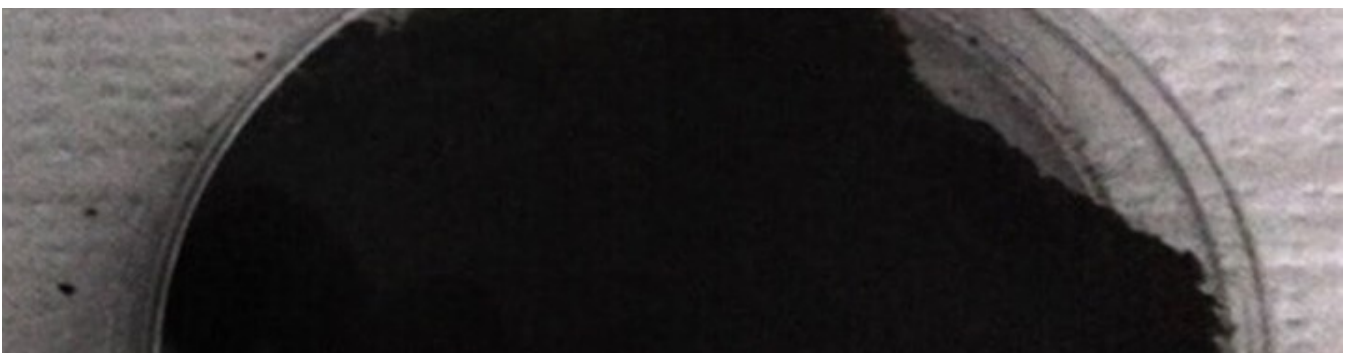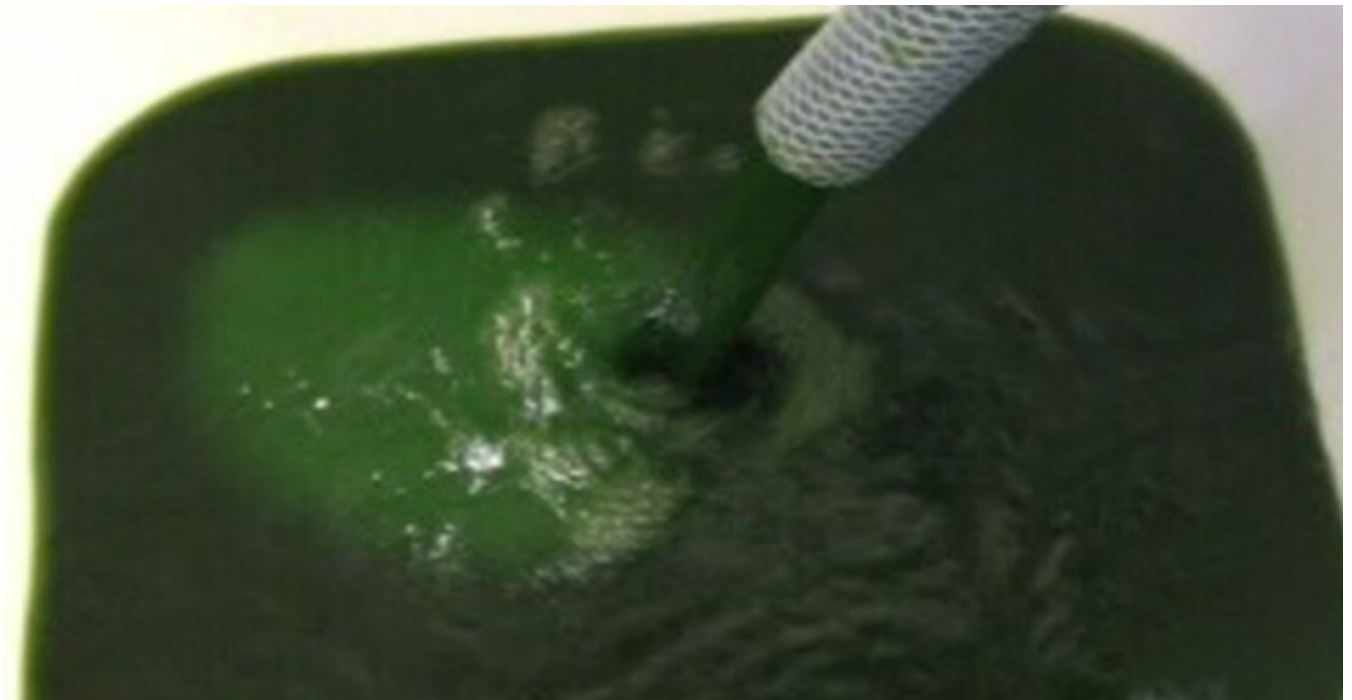

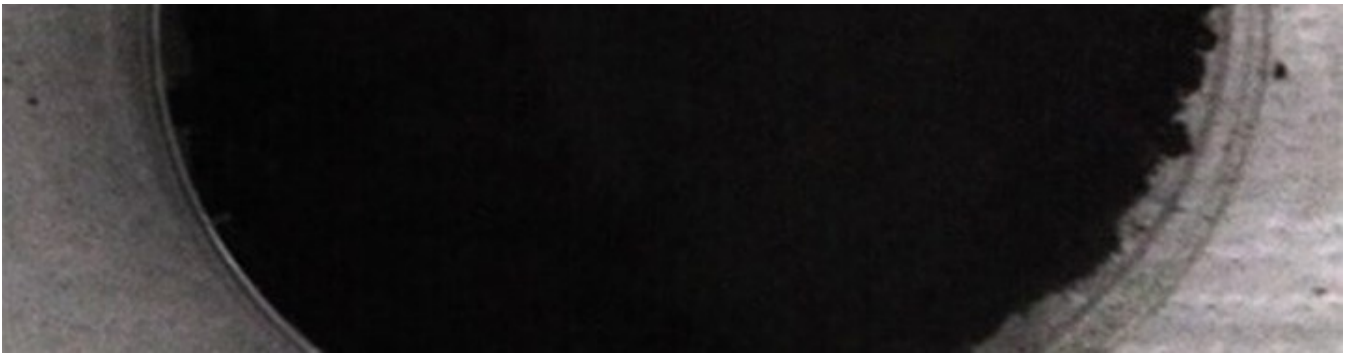A square graphic with a blue, bubbly background. The text "LIQTECH WATER" is in large, bold, white letters, and "Water Treatment Solutions" is in smaller white letters below it.


LIQTECH WATER
Water Treatment Solutions

A square graphic with a background of white ceramic tubes. The text "LIQTECH CERAMICS" is in large, bold, white letters, and "Silicon Carbide Membranes & DPF" is in smaller white letters below it.

LIQTECH CERAMICS
Silicon Carbide Membranes
& DPF

A square graphic with a background of white plastic pipes. The text "LIQTECH PLASTICS" is in large, bold, white letters, and "Six Decades of Plastic Processing" is in smaller white letters below it.

LIQTECH PLASTICS
Six Decades of Plastic
Processing

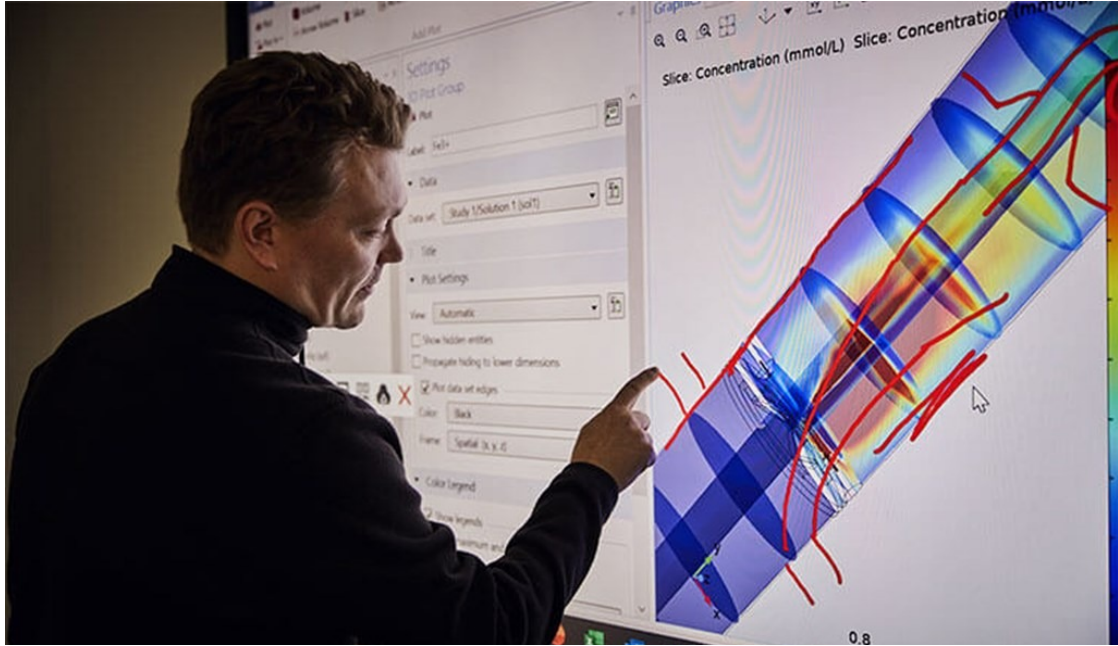

See more innovation projects

Go back to our innovation section and learn more about our interesting projects.

Maybe you would like to learn more about removal of pollutants present in very small amount in aqueous systems? Or cutting edge technologies to separate water and organic material from pelagic industries effluents?